
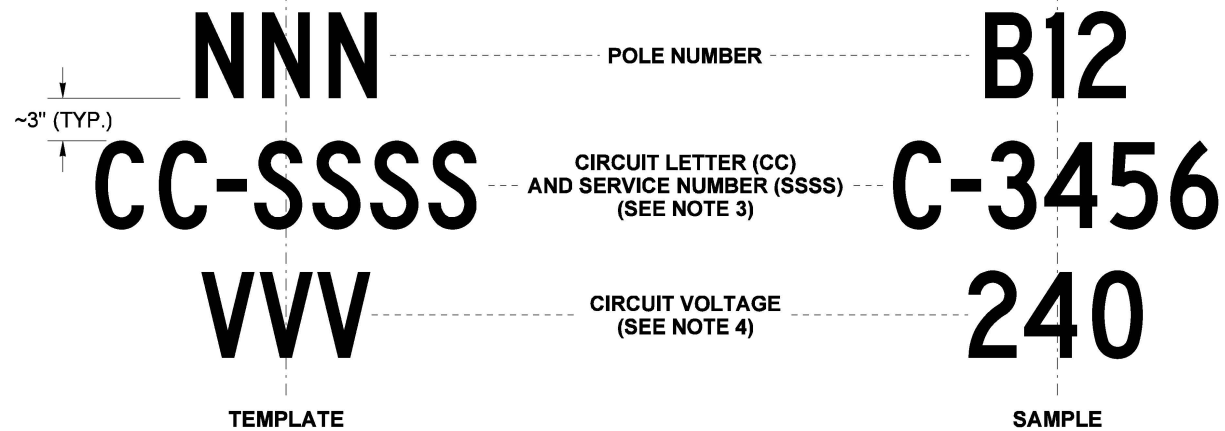



ELEVATION VIEW

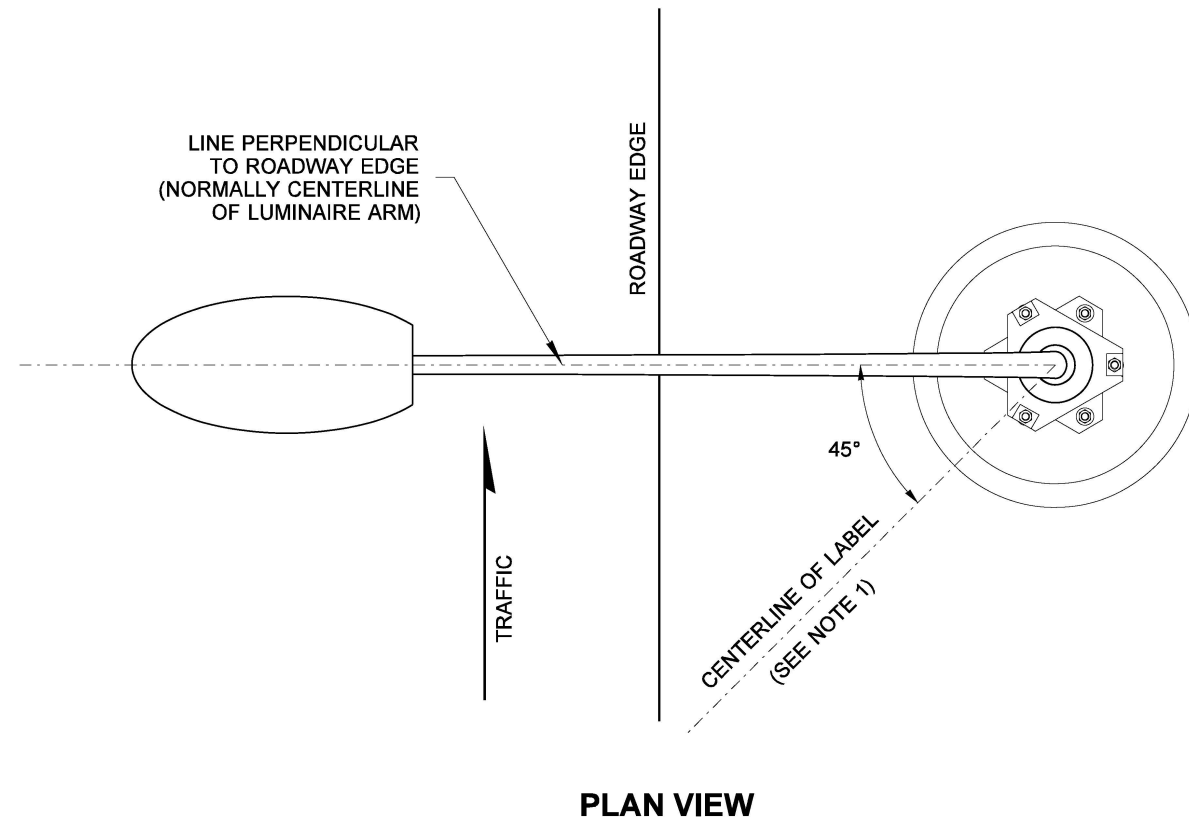

LABEL INFORMATION DETAIL

NOTES

1. Pole labels shall be applied three feet from the base of the pole, as measured to the bottom of the label. The label shall be oriented at a 45 degree angle towards adjacent oncoming traffic.
2. Characters shall be 4 inch tall block gothic letters and numbers. Letters shall be painted on using enamel alkalyd gloss paint conforming to **Federal Specification TT-E-489**. Labels shall be black in color, with the exception of labels for colored poles (black, brown, or green poles) which shall use white labels.
3. Service numbers shall not include the prefix letters (SXX).
4. Service voltage shall read 120, 240, or 480 as applicable.
5. Type III and Type V signal standards with luminaires installed shall be labeled.

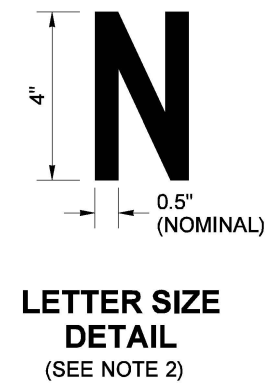

Aug 30, 2022

POLE LABELING

STANDARD PLAN J-28.01-00

SHEET 1 OF 1 SHEET

APPROVED FOR PUBLICATION

Mark Gaines Aug 30, 2022
Mark Gaines (Aug 30, 2022 11:20 PDT)

Aug 30, 2022

STATE DESIGN ENGINEER

Washington State Department of Transportation