



CASE 4

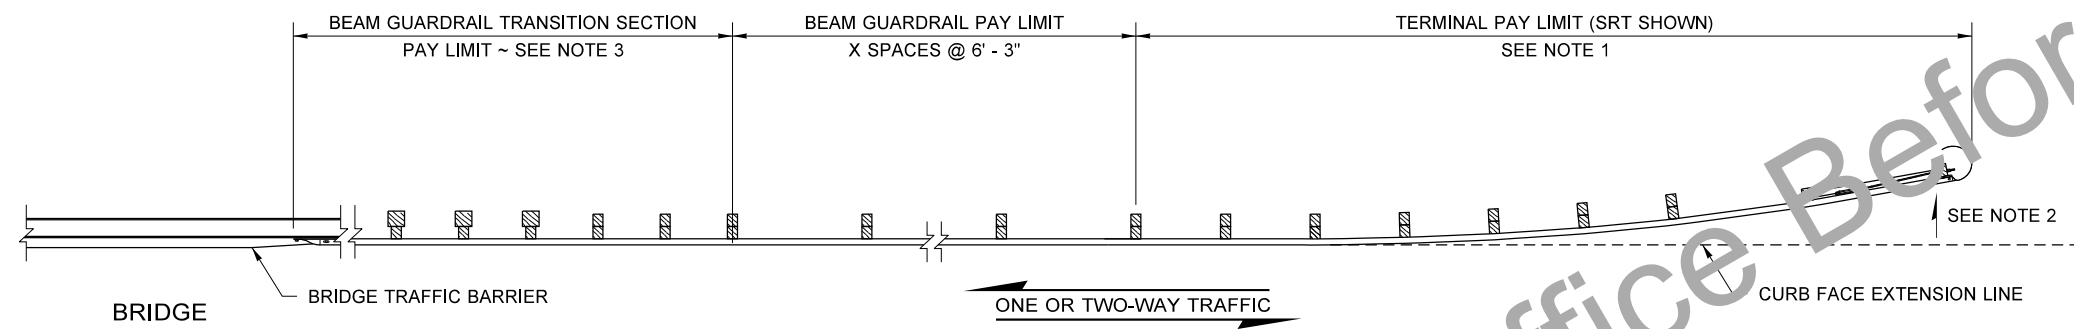

CASE 5

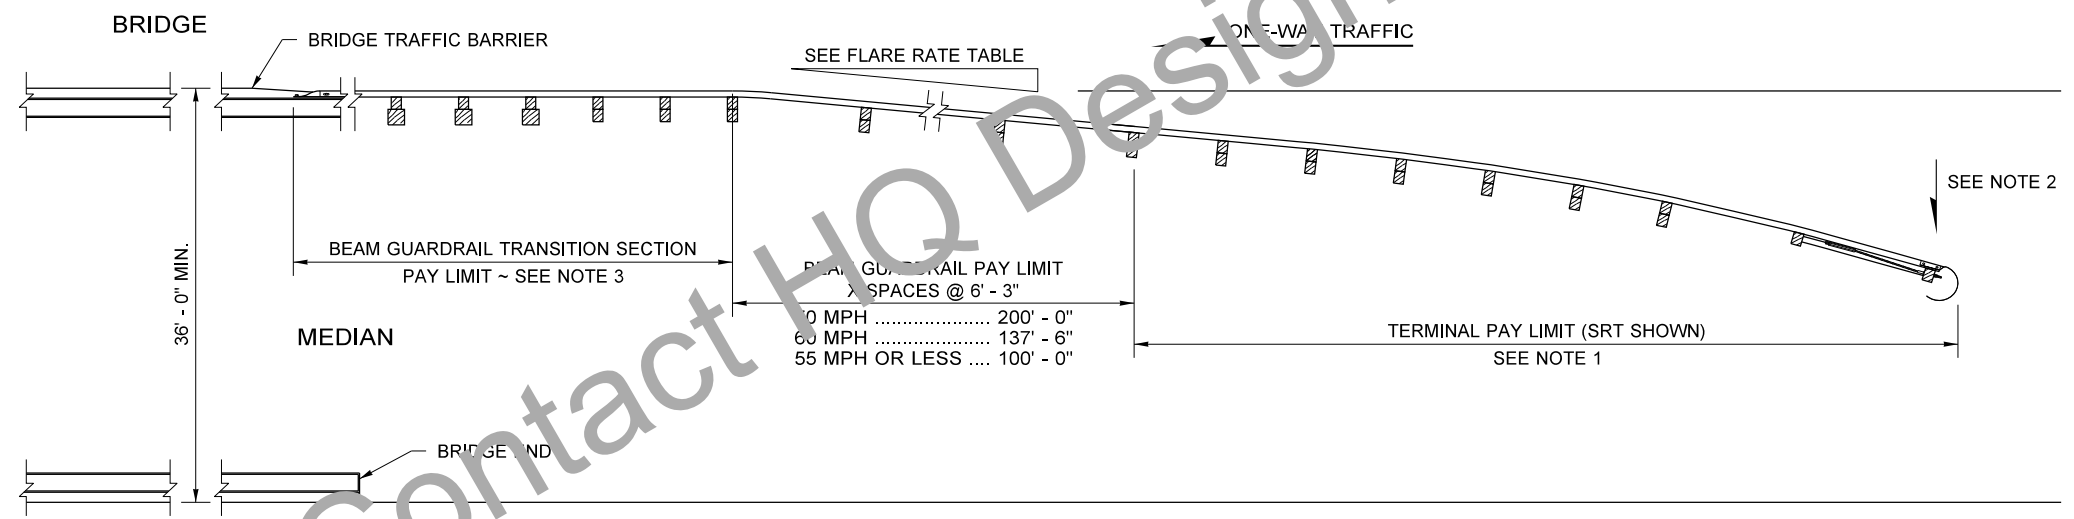

CASE 6

TYPE 1 GUARDRAIL PLACEMENT (CASES 4, 5, & 6)

NOTES

1. FOR TERMINAL TYPE AND DETAILS, SEE CONTRACT AND APPLICABLE PLAN(S).
2. THE SLOPE FROM THE EDGE OF THE SHOULDER INTO THE FACE OF THE GUARDRAIL SHOULD NOT BE STEEPER THAN 10H : 1V WHEN THE GUARDRAIL IS WITHIN 12' - 0" FROM THE EDGE OF THE SHOULDER.
3. SEE CONTRACT FOR BEAM GUARDRAIL TRANSITION SECTION TYPE AND CONNECTION TO BRIDGE TRAFFIC BARRIER OR CONCRETE BARRIER.

FLARE RATE TABLE

POSTED SPEED (MPH)	RATE
70	15 : 1
60	14 : 1
55	12 : 1
50	11 : 1
45	10 : 1
40 OR LESS	9 : 1

FILE NAME S:\Design R P & S\4-Standards\2-Plan Sheet Library\01-Published PSL\TB) Traffic Barrier(TB-C series) plans converted\TB-c2a\TB-c2a.dgn		REGION NO. STATE		FED.AID PROJ.NO.		 Washington State Department of Transportation		Plot 1	
TIME 9:03:08 AM	DATE 8/30/2018	10	WASH					PLAN REF NO TB-C2a	
PLOTTED BY liddelf	DESIGNED BY	JOB NUMBER		LOCATION NO.		SHEET OF SHEETS			
ENTERED BY	CHECKED BY	CONTRACT NO.							
PROJ. ENGR.	REVISION	DATE	BY	DATE		P.E. STAMP BOX			
REGIONAL ADM.				DATE		P.E. STAMP BOX			