


**GIRDER ELEVATION
MID-SEGMENT**

* OMIT HOLES AND PLACE INSERTS ON THE INTERIOR FACE OF EXTERIOR GIRDERS. PLACE HOLES AND INSERTS PARALLEL TO SKEW. INSERTS SHALL BE 1"Ø MEADOWBURKE MX-3 HI-TENSILE, 1"Ø MEADOWBURKE FX-19 FERRULE INSERT, 1"Ø x 5½" WILLIAMS F22 OPEN FERRULE INSERT, 1"Ø x 4½" DAYTON-SUPERIOR F-62 FLARED THIN SLAB FERRULE INSERT OR APPROVED EQUAL. (TYP.)

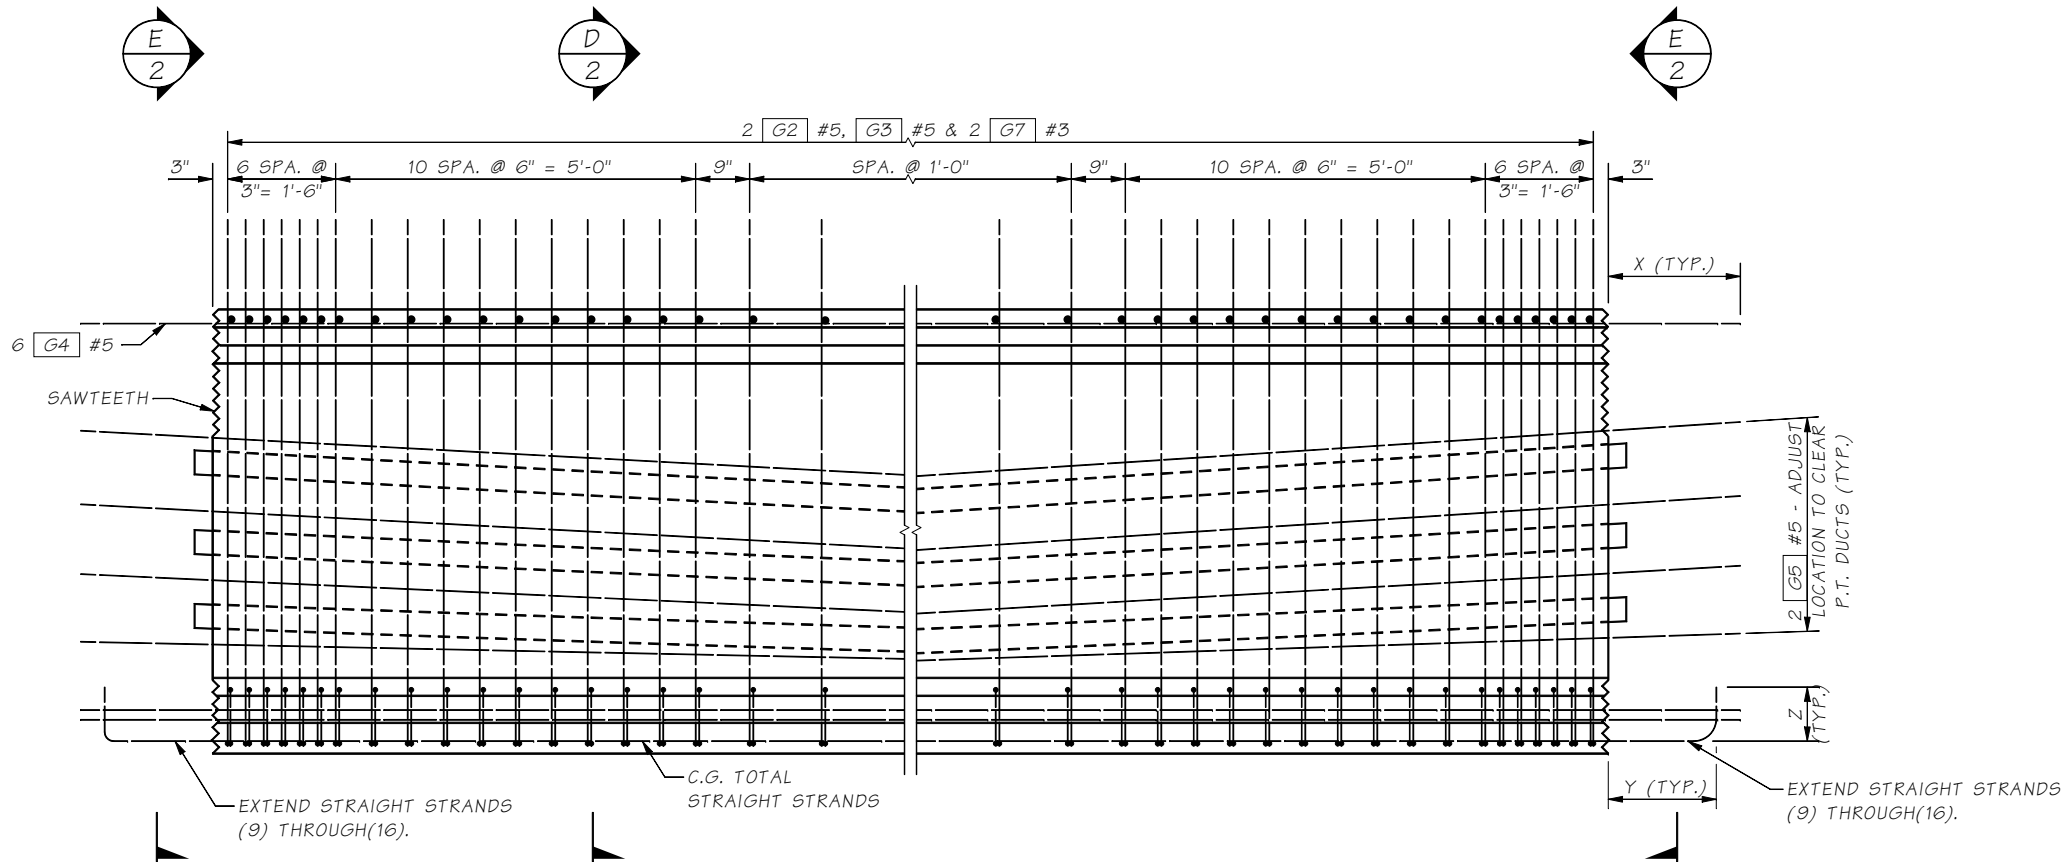

**ELEVATION
MID-SEGMENT REINFORCING**

Last revised: 5/23/16

SHEET NO. SR 5.9-A1-4

| | | | | | | | | | |
|-----------------------|--|----------|----|------|------------|-------|--------------------|-----------|--------------|
| Bridge Design Engr. | M:\STANDARDS\Girders\PT Wide Flange\WF74PTG4.MAN | | | | REGION NO. | STATE | FED. AID PROJ. NO. | SHEET NO. | TOTAL SHEETS |
| Supervisor | | | | | 10 | WASH. | | | |
| Designed By | | | | | JOB NUMBER | | | | |
| Checked By | | | | | | | | | |
| Detailed By | | | | | | | | | |
| Bridge Projects Engr. | | | | | | | | | |
| Prelim. Plan By | | | | | | | | | |
| Architect/Specialist | DATE | REVISION | BY | APPD | | | | | |

Wed May 25 09:02:53 2016

**BRIDGE
AND
STRUCTURES
OFFICE**



**STANDARD
PRESTRESSED CONCRETE GIRDERS**

WF74PTG GIRDER
DETAILS 4 OF 5

BRIDGE SHEET NO.
SHEET
OF
SHEETS